

9.6 kW portable wall charger



J+ BOOSTER 2



Compatible

The J+ BOOSTER 2 is compatible with all current and future EVs with a J1772 connector or adapter.



Rugged

Made of military grade aluminum, it withstands up to 6,600lb. (3,000kg) of pressure and is totally protected against dust & waterproof by IP67.



Secure J+ CONNECTORS

The proprietary connectors are based on proven aerospace technology and are splash and dust proof, guaranteeing safety and reliability every time you charge.

Take your wall charger with you and charge from any electrical outlet, 120 V or 240 V, taking range anxiety out of EV ownership.

The J+ BOOSTER 2 automatically selects the highest safely available amperage to charge your EV as efficiently and quickly as possible.


J+ BOOSTER 2

The portable wall charger for anywhere and everywhere



Wall bracket

When connected to a 240V outlet, the J+ BOOSTER 2 becomes a fully fledged primary wall charger.

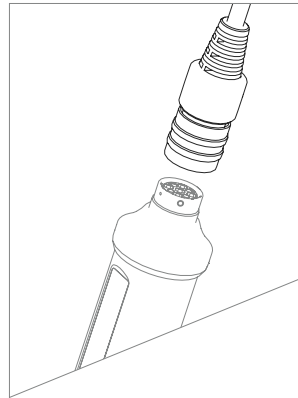

Convenient

The J+ CONNECTOR will automatically choose the best setting, regardless of the outlet's voltage or amperage.

100% compatible



with all electric vehicles equipped with a J1772 connector or adapter.

25 feet/7.6 m long cable

Strong and sturdy high quality cable.

Good to know

The J+ BOOSTER 2 is a 2 in 1 charging solution in a compact size:

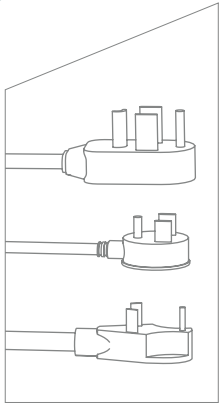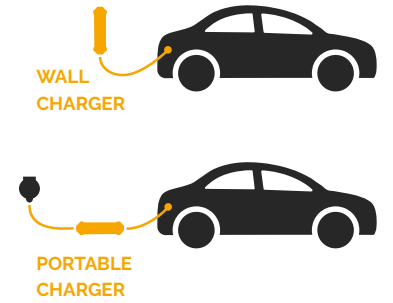

Adaptable


Charge at any electric outlet throughout North America thanks to a comprehensive assortment of 120V and 240V adapters.

7+ more



Theft proof

The adapter lock provides theft protection at all times.



Integrated residual-current detection

CCID20 effectively protects your house and EV.

Residual-current circuit breaker

Integrated DC and AC fault-current protection eliminates the need to install an expensive residual-current circuit breaker in your home, saving costs and hassle.


Carry-on Bag

Included is a sturdy carry-on bag with Velcro strips keeping the bag from sliding in the trunk, or frunk.



Rugged

Drive-over resistant up to 6,600 lb/3 metric ton.



Waterproof

Operable in any kind of weather.

Lightweight

Weighs less than 2.2 lb/1 kg.

Technical specifications

Dimensions	Length: 11" (280 mm), Diameter: 2.76" (70 mm)
Weight	2.2 lb (1.0kg) excluding cables, 7 lb (3.2kg) with cables and adapters
Rated current	6 A to 40A
Power output	720 W - 9.6 kWAC
Voltage	120V/240V
Color	Metallic anthracite, black cable
Operating temperature	-22°F / -30°C to 122°F / +50°C

Standards	UL2594, UL2231-1, UL2231-2, IEC 62196, IEC 61851-1, RoHS
Protection class - Residual current device	class I - CCID 20mA - Ground conductor, temperature monitoring
Outlet adapters	10 self-detecting NEMA adapters
Vehicle-end connector	SAE J1772 (Type 1)
Total cable length	approx. 25 feet/7.6 meters


Subject to change without prior notice.



J+ BOOSTER 2

no more range anxiety

Find more information
and accessories here:
jplusamericas.com/jb2

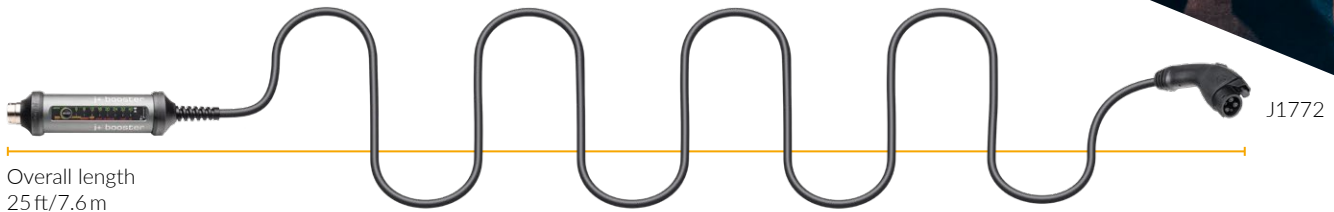

Overall length
25 ft/7.6 m

J1772

Outlet adapters

- NEMA 5-15
1.474 kW
- NEMA 6-15
2.88 kW
- NEMA 5-20
1.92 kW
- NEMA 6-20
3.88 kW
- NEMA TT-30
2.88 kW
- NEMA 14-30
5.76 kW
- NEMA 6-50
9.6 kW
- NEMA 14-50
9.6 kW
- SS2-50
9.6 kW
- LS-30
2.88 kW